


Modello	Portata Kg	S (S1+S2) m	S1 m	S2 m	H m	h mm	D1 mm	B mm	C mm	Trave IPE
CS-125/3	125	3	1	2	3	2834	255	347	400	120
CS-125/4	125	4	2	2	3	2834	255	347	400	120
CS-125/5	125	5	2	3	3,5	3292	280	347	400	160
CS-125/6	125	6	3	3	3,5	3292	280	527	400	160
CS-125/7	125	7	3	4	3,5	3272	345	527	550	180
CS-125/8	125	8	4	4	3,5	-	-	-	-	-
CS-250/3	250	3	1	2	3	2812	280	527	400	140
CS-250/4	250	4	2	2	3	2812	280	527	400	140
CS-250/5	250	5	2	3	3,5	3272	345	677	550	180
CS-250/6	250	6	3	3	3,5	3272	345	677	550	180
CS-250/7	250	7	3	4	3,5	3232	345	677	550	220
CS-250/8	250	8	4	4	3,5	-	-	-	-	-
CS-500/3	500	3	1	2	3,5	3272	345	677	550	180
CS-500/4	500	4	2	2	3,5	3272	370	677	550	180
CS-500/5	500	5	2	3	3,5	3232	370	677	550	220
CS-500/6	500	6	3	3	4	3732	420	677	700	220
CS-500/7	500	7	3	4	4	3678	480	907	700	270
CS-500/8	500	8	4	4	4	-	-	-	-	-
CS-1000/3	1000	3	1	2	3,5	3208	455	677	550	240
CS-1000/4	1000	4	2	2	4	3708	480	677	700	240
CS-1000/5	1000	5	2	3	4	3678	480	907	700	270

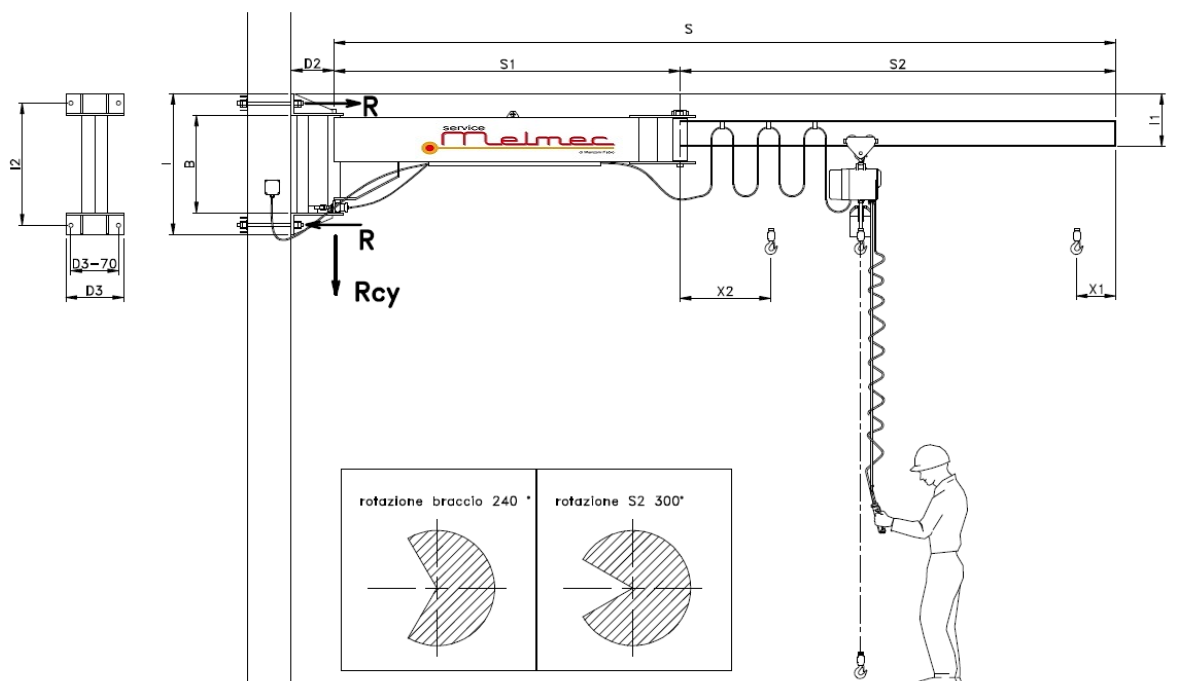

Modello	Portata Kg	S (S1+S2) m	S1 m	S2 m	B mm	I mm	D2 mm	I1 mm	D3 mm	I2 mm	Trave IPE
MS-125/3	125	3	1	2	347	647	255	288	400	507	120
MS-125/4	125	4	2	2	347	647	255	288	400	507	120
MS-125/5	125	5	2	3	347	827	280	328	400	692	160
MS-125/6	125	6	3	3	527	827	280	328	400	692	160
MS-125/7	125	7	3	4	527	977	295	348	400	842	180
MS-125/8	125	8	4	4	-	-	-	-	-	-	-
MS-250/3	250	3	1	2	527	827	280	308	400	692	140
MS-250/4	250	4	2	2	527	827	280	308	400	692	140
MS-250/5	250	5	2	3	677	977	295	348	400	842	180
MS-250/6	250	6	3	3	677	977	295	348	400	842	180
MS-250/7	250	7	3	4	677	977	310	388	400	842	220
MS-250/8	250	8	4	4	-	-	-	-	-	-	-
MS-500/3	500	3	1	2	677	977	295	348	400	842	180
MS-500/4	500	4	2	2	677	977	320	348	400	842	180
MS-500/5	500	5	2	3	677	977	320	388	400	842	220
MS-500/6	500	6	3	3	677	1207	320	388	450	1075	220
MS-500/7	500	7	3	4	907	1207	355	438	450	1075	270
MS-500/8	500	8	4	4	-	-	-	-	-	-	-
MS-1000/3	1000	3	1	2	677	977	355	408	450	842	240
MS-1000/4	1000	4	2	2	677	1207	355	408	450	1075	240
MS-1000/5	1000	5	2	3	907	1207	355	438	450	1075	270